




# Airbrick

Effective airbrick ventilator available in a range of colours

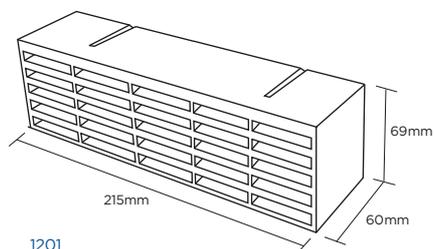

## Use

- In conjunction with the telescopic underfloor ventilator for providing ventilation below suspended ground floors
- In conjunction with cavity sleeves for ventilation through external walls to a building interior

## Features and benefits

- Equivalent area of 6170mm<sup>2</sup> per air brick
- Unique stepped front grille greatly reduces the entry of wind driven rain
- 6.5mm wide front grille openings comply with BS 5440 Pt 2 and British Gas requirements
- Integral clip together facility allows multiple airbricks to be stacked to form 9" x 6" and 9" x 9" sizes
- Available in a range of colours to blend in with various brick types
- Very tough and robust
- Durable and totally resistant to decay
- 9" x 6" cowl version available to replace double air brick - provides an equivalent area of 11,000mm<sup>2</sup>

## Quality

- Satisfies all NHBC requirements
- Manufactured to BS EN ISO 9001 and BS EN ISO 14001
- Complies with all relevant Building Regulations
- Meets all relevant British Standards
- Equivalent area marking to front face of airbrick to comply with BS EN 13141-1 : 2004

## Material and colour choice

- Manufactured by injection moulding in UV stabilised polypropylene
- The 1201AB airbrick is available in buff, terracotta, grey, brown, black and white, in packs of 20

## Installation advice

- Always use in conjunction with a Timloc telescopic underfloor ventilator, or cavity sleeve, depending on the application

**Please see technical section for more details.**

## How to order

- Airbrick quantity will be relative to the number of telescopic underfloor ventilators or cavity sleeves required. Please see technical section
- State the colour required

## Bill of quantity

NBSPlus

### F30 Accessories/sundry items for brick/block/stone walling

Clause

- 160 AIR BRICK  
To BS493, Class 1, built in as the work proceeds.
- Manufacturer: **Timloc Building Products, Rawcliffe Road, Goole, East Yorkshire, DN14 6UQ. Tel: 01405 765567, Fax: 01405 720479. Web: www.timloc.co.uk**
  - Reference: **1201AB (Interlinking Airbrick)**
  - Design: **Rectangular**
  - Work size: **Each unit 69mm coursing x 215mm, (Equivalent area 6170mm<sup>2</sup>)**
  - Material: **Thermoplastic**
  - Colour:..... **(Black, White, Brown, Buff, Grey or Terracotta)**
  - Optional Accessories:.....  
e.g. **1201 Telescopic Cranked Under Floor Vent (6,000mm<sup>2</sup>)**

## Product codes

### Airbrick

Equivalent area	Colour	Product code
6170mm <sup>2</sup>	Buff	1201ABBU
6170mm <sup>2</sup>	Terracotta	1201ABTE
6170mm <sup>2</sup>	Grey	1201ABGR
6170mm <sup>2</sup>	Brown	1201ABBR
6170mm <sup>2</sup>	Black	1201ABBL
6170mm <sup>2</sup>	White	1201ABWH

### Double airbrick replacement cowl

Equivalent area	Colour	Product code
11,000mm <sup>2</sup>	Buff	1230ABBU
11,000mm <sup>2</sup>	Brown	1230ABBR
11,000mm <sup>2</sup>	Terracotta	1230ABTE

NB. Guidance in BS EN 13141-1 : 2004 indicates the "free area" of a background ventilator is typically 25% larger than its "equivalent area"

