


TECHNICAL INFORMATION FOR

---

# FINE THREAD DRYWALL SCREWS


---

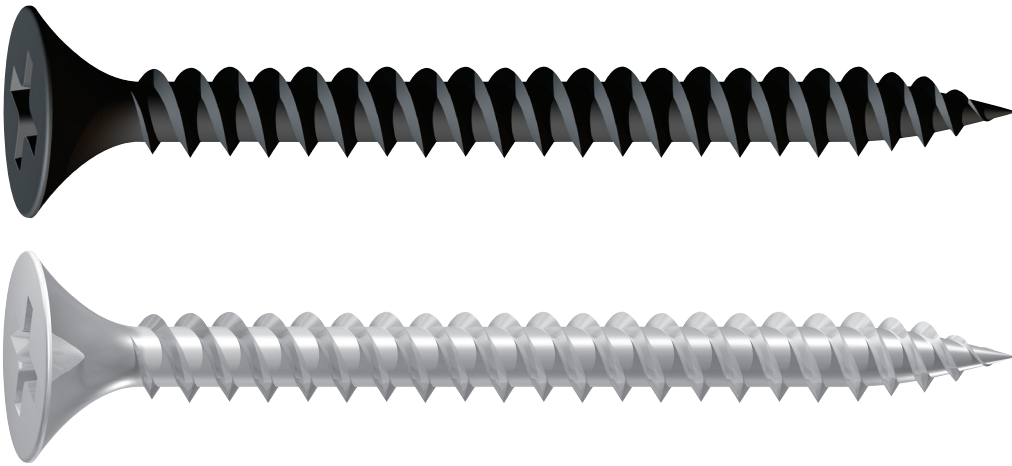



TECHNICAL DATA SHEET



## DRYWALL SCREWS - FINE THREAD




- Used to secure plasterboard to drywall track and ceiling track systems (Max 0.7mm)



### FEATURES



- Phillips No.2 recess for a positive drive.
- Bugle head to reduce likelihood of damaging the board surface.
- Thread offers excellent pull out values and insertion speed into a maximum of 0.7mm steel.
- 60degree twinthread offers excellent pull out values and insertion speed.
- 25° 'Super Sharp' point for ease of penetration.
- Plated in a BZP (Bright Zinc Plate) or Black Phosphate to withstand over 50hrs salt spray. Tested in accordance with ASTM B117-11.
- Manufactured from a hardened durable C1018 carbon steel, offering excellent strength and ductility.
- Full batch traceability.



On rare occasions the use of black phosphate screws may result in staining or damage to the finished surface.

### PRODUCT RANGE

**BLACK PHOS.**


Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00025DRY	3.5 x 25	1,000	16	16,000	384	384,000
00032DRY	3.5 x 32	1,000	12	12,000	324	324,000
00038DRY	3.5 x 38	1,000	12	12,000	288	288,000
00042DRY	3.5 x 42	1,000	9	9,000	216	216,000
00045DRY	3.5 x 45	1,000	8	8,000	192	192,000
00050DRY	3.5 x 50	1,000	6	6,000	144	144,000
00055DRY	3.5 x 55	500	12	6,000	288	144,000
00060DRY	3.5 x 60	500	12	6,000	288	144,000
00065DRY	4.2 x 65	500	8	4,000	192	96,000
00075DRY	4.2 x 75	500	8	4,000	192	96,000
00090DRY	4.8 x 90	500	6	3,000	144	72,000
00100DRY	4.8 x 100	500	6	3,000	144	72,000

### PRODUCT RANGE

**ZINC**

Product Code	Size (mm)	Box Qty	Carton Qty (Box)	Carton Qty	Pallet Qty (Box)	Pallet Qty
00025DRYZ	3.5 x 25	1,000	16	16,000	384	384,000
00032DRYZ	3.5 x 32	1,000	12	12,000	324	324,000
00038DRYZ	3.5 x 38	1,000	12	12,000	288	288,000
00042DRYZ	3.5 x 42	1,000	9	9,000	216	216,000
00045DRYZ	3.5 x 45	1,000	8	8,000	192	192,000
00050DRYZ	3.5 x 50	1,000	6	6,000	144	144,000
00055DRYZ	3.5 x 55	500	12	6,000	288	144,000
00060DRYZ	3.5 x 60	500	12	6,000	288	144,000
00065DRYZ	4.2 x 65	500	8	4,000	192	96,000
00075DRYZ	4.2 x 75	500	8	4,000	192	96,000
00090DRYZ	4.8 x 90	500	6	3,000	144	72,000
00100DRYZ	4.8 x 100	500	6	3,000	144	72,000
00125DRYZ	4.8 x 125	100	18	1800	432	43,200
00150DRYZ	4.8 x 150	100	18	1800	432	43,200

### INSTALLATION GUIDELINES

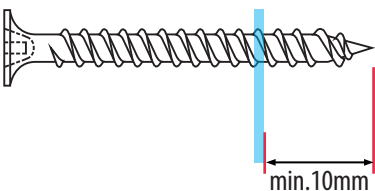

In order to guarantee a secure fixing, the screw must fully penetrate and protrude through the back of the steel by a minimum of 10mm

### DIMENSIONS

Product Code	DK (mm)	L (mm)	d (mm)	D (mm)	TI (mm)	Max Drill Thickness (mm)
00025DRY / Z	8.15	25.0	2.15	3.50	18.0	0.8
00032DRY / Z	8.15	32.0	2.15	3.50	25.0	0.8
00038DRY / Z	8.15	38.0	2.15	3.50	31.0	0.8
00042DRY / Z	8.15	42.0	2.15	3.50	35.0	0.8
00045DRY / Z	8.15	45.0	2.15	3.50	38.0	0.8
00050DRY / Z	8.15	50.0	2.15	3.50	43.0	0.8
00055DRY / Z	8.15	55.0	2.15	3.50	50.0	0.8
00060DRY / Z	8.15	60.0	2.15	3.50	50.0	0.8
00065DRY / Z	8.15	65.0	2.60	4.20	50.0	0.8
00075DRY / Z	8.15	75.0	2.60	4.20	50.0	0.8
00090DRY / Z	8.70	90.0	3.40	4.80	50.0	0.8
00100DRYZ	8.70	100.0	3.40	4.80	61.5	0.8
00125DRYZ	8.70	125.0	3.40	4.80	67.5	0.8
00150DRYZ	8.70	150.0	3.40	4.80	67.5	0.8

\*all figures stated are approximate and for reference only.

DK	Head Diameter
L	Length
TI	Thread Length
d	Minor diameter
D	Major Diameter

