




# TRADE<sup>PRO</sup> SQUARE-RUNG EXTENSION LADDER



**DURABLE &  
LIGHTWEIGHT**

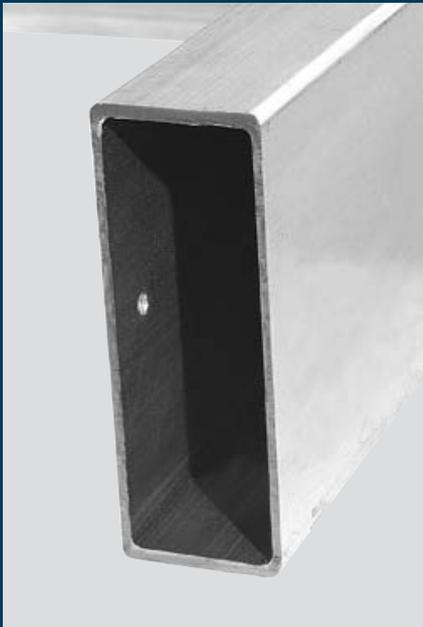

Box section stiles for maximum strength and durability.



## EXCEPTIONALLY ROBUST AND BUILT TO LAST



Durable square rungs for enhanced comfort



Robust locking catches for added security



Available in single, double and triple styles



# TRADE<sup>PRO</sup> SQUARE-RUNG EXTENSION LADDER



## 150kg

**MAX. LOAD**  
(Load includes user, tools, materials, etc.)



Unique wrap-around top clips with smooth-glide runners to reduce wear and tear

High performance robust box section stiles for strength and rigidity

Heavy-duty wide stabiliser with slip-resistant feet for added stability\*\*



- Constructed using high grade aluminium - lightweight but sturdy

## SPECIFICATIONS

Product Code	Section x Rungs	Closed Length	Open Length	Safe Working Height*	Product Weight
--------------	-----------------	---------------	-------------	----------------------	----------------

### SINGLE SECTION

57010220	1 x 10	3.05m (10')	3.05m (10')	3.68m (12'1")	6.8kg
57010420	1 x 14	4.17m (13'8")	4.17m (13'8")	4.76m (15'7")	9.1kg
57010620	1 x 18	5.29m (17'4")	5.29m (17'4")	5.85m (19'2")	11.8kg
57010720	1 x 20	5.85m (19'2")	5.85m (19'2")	6.39m (20'11")	12.9kg

### DOUBLE SECTION

57711020	2 x 6	1.83m (6')	2.95m (9'8")	3.59m (11'9")	7.8kg
57711120	2 x 8	2.39m (7'10")	4.07m (13'4")	4.67m (15'4")	10.8kg
57711220	2 x 10	2.98m (9'9")	4.94m (16'2")	5.51m (18'1")	13.1kg
57711320	2 x 12	3.56m (11'8")	6.08m (19'11")	6.61m (21'8")	17.3kg
57711420	2 x 14	4.13m (13'6")	7.21m (23'8")	7.70m (25'3")	19.8kg
57711520	2 x 16	4.69m (15'4")	8.33m (27'4")	8.78m (28'10")	26.3kg
57711620	2 x 18	5.20m (17'1")	9.12m (29'11")	9.55m (31'4")	29kg

### TRIPLE SECTION

57712020	3 x 6	1.88m (6'2")	4.12m (13'6")	4.72m (15'9")	12.8kg
57712120	3 x 8	2.44m (8')	5.80m (19')	6.34m (20'9")	15.9kg
57712220	3 x 10	2.99m (9'10")	6.91m (22'8")	7.41m (24'4")	23.3kg
57712320	3 x 12	3.57m (11'8")	8.61m (28'3")	9.05m (29'8")	28.8kg
57712420	3 x 14	4.13m (13'7")	9.73m (31'11")	10.13m (33'3")	33kg

\*Based on 1.75m (5'9") as the average reach height of a person.  
\*\*Stabiliser bar is not required or supplied with the double 1.83m model.

Locking catches secure sections together for safe use and easy transportation

Slip-resistant square rungs for comfort and security



**EN131**

Suitable for Professional & Non-professional use